

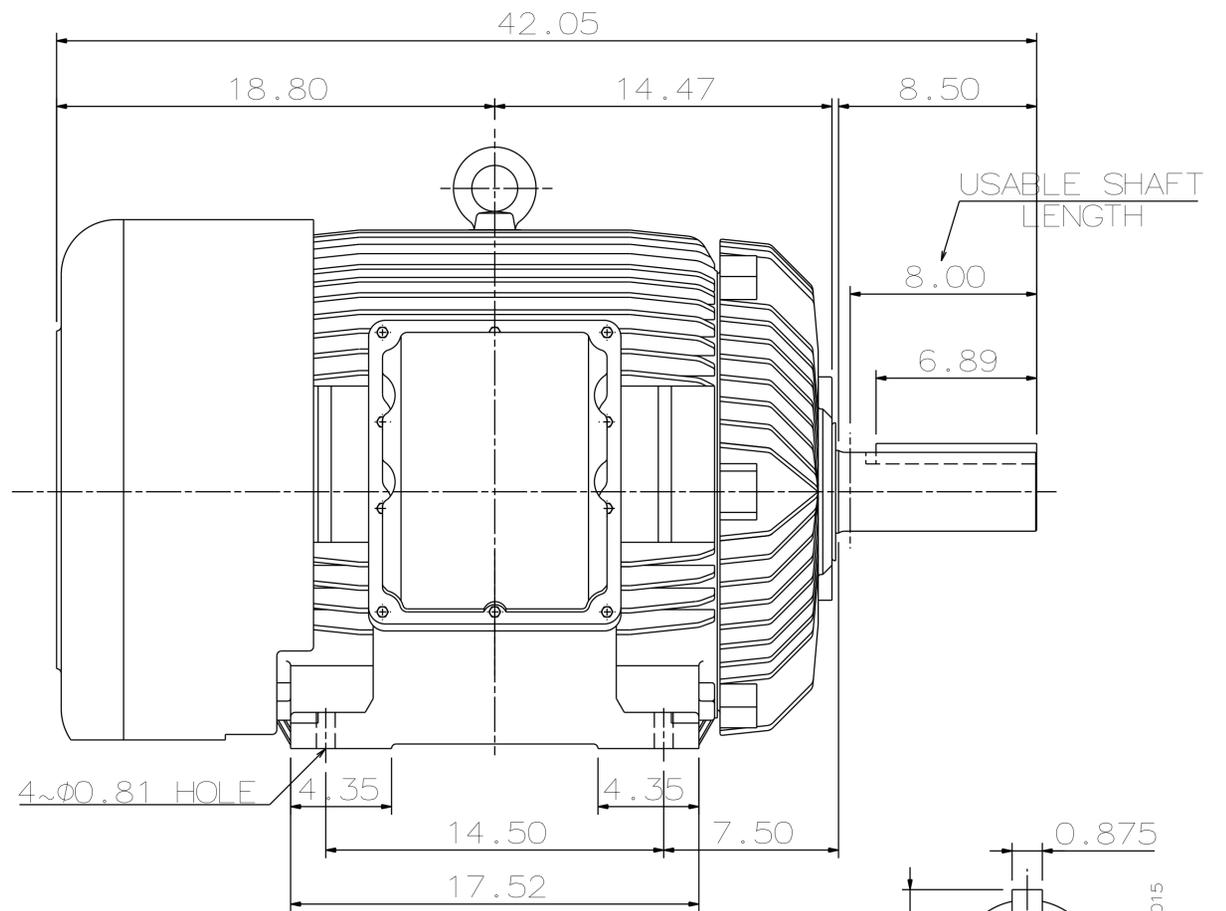


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP.	kW.					
AEHHXU	125	93.2	4	CONT.	575	60	1800

TOTALLY ENCLOSED FAN-COOLED TYPE . SQUIRREL-CAGE ROTOR

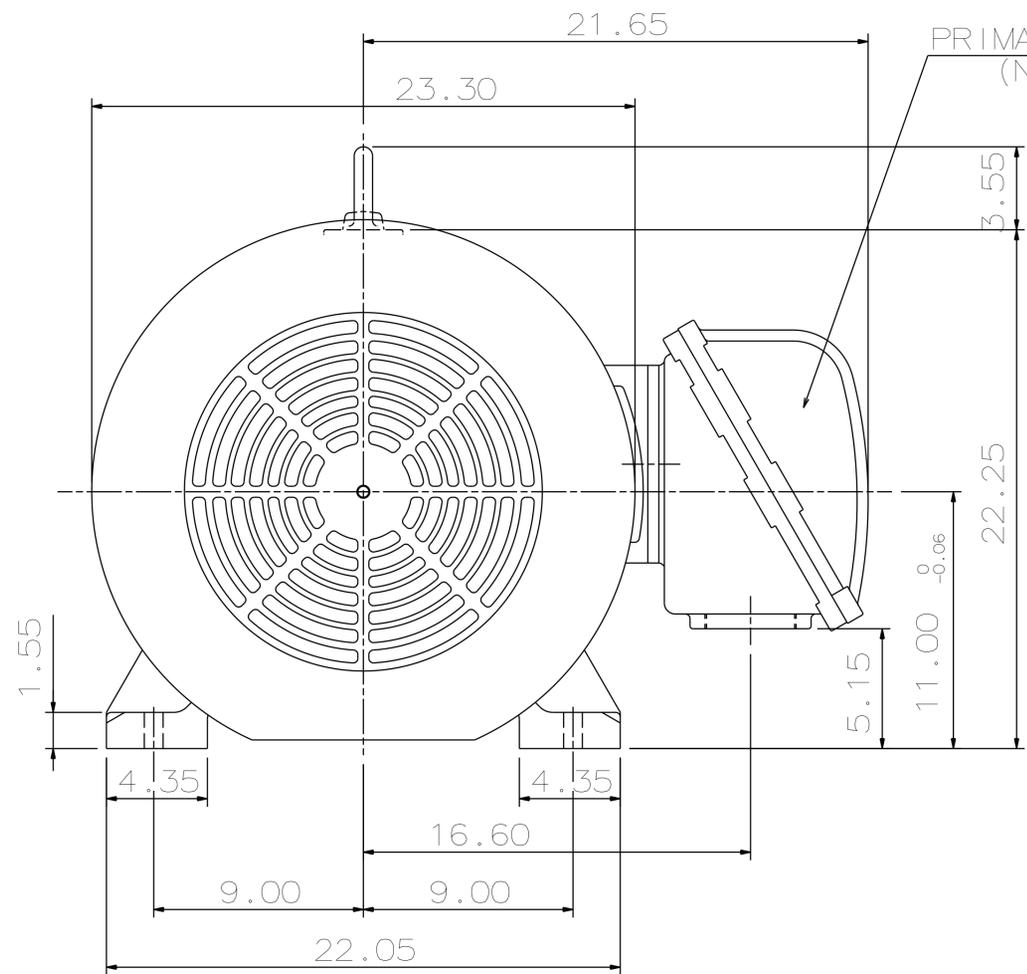

SHAFT END ENLARGED VIEW

NOTE :

1. DIMENSIONS IN INCHES
2. FRAME NO. 444T
3. F CLASS INSULATION
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP44
6. UL EXPLOSION PROOF
7. NON-SPARKING FAN
8. BEARING SIZE: DRIVE-END 6318C3
OPP. DRIVE-END 6318C3
9. CLASS I, DIVISION 1, GROUP D AND CLASS II, GROUPS E, F AND G TEMP CODE T2D/T3B.

DWN.	H. CHEN	DEC. 21. 2010
CHKD.	W. WENG	DEC. 21. 2010
APPD.	T. HSIAO	DEC. 21. 2010

DATE	DEC 08 2016	OUTLINE DIMENSIONS	
XP12545		3-PHASE INDUCTION MOTOR	
TEC Westinghouse		DWG NO.	REV: 00
		3A049DTA10108-53	