
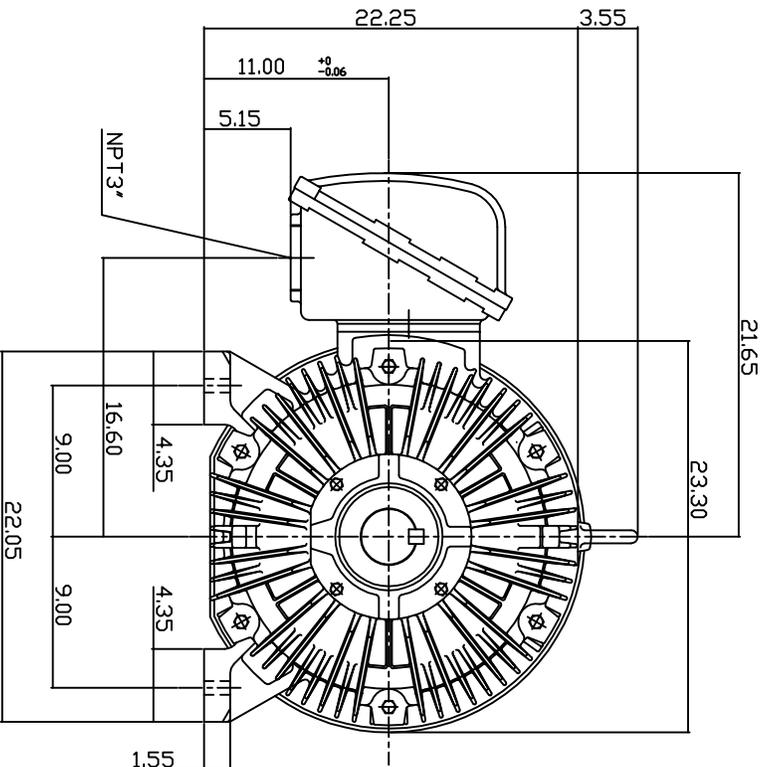



| TYPE | OUTPUT | | POLE | TIME RATING | VOLTAGE | Hz | SYN SPEED R.P.M |
|--------|--------|-----|------|-------------|---------|----|-----------------|
| | HP. | KW. | | | | | |
| AEHXXU | 125 | 93 | 6 | CONT. | 230/460 | 60 | 1200 |

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

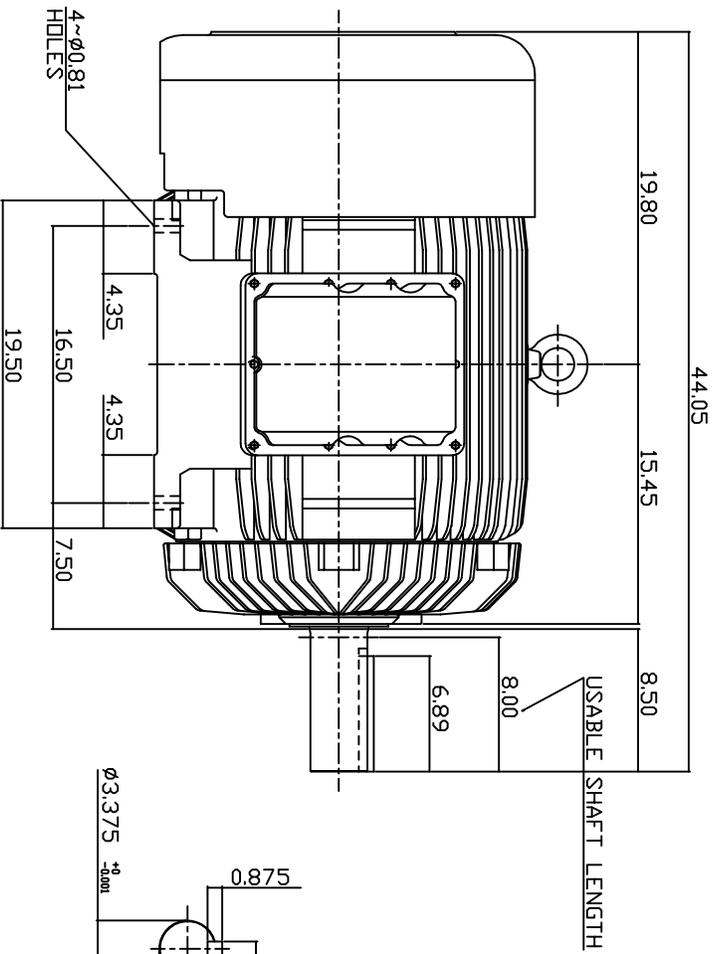

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO. 445T
3. F CLASS INSULATION, S.F.1.15
4. UL EXPLOSION PROOF
5. SUITABLE FOR DIVISION I, CLASS I, GROUP D, CLASS II, GROUP E, F, G.
6. BEARING SIZE: DRIVE END: 6318
NON-DRIVE END: 6318
7. MOTOR APPRX. WEIGHT: 1720 LBS

TX-56

| | | |
|-------|--------|-------------|
| DWN. | W.LLIN | APR-07-2003 |
| CHKD. | W.LLIN | APR-07-2003 |
| APPD. | C.WANG | APR-07-2003 |

| | | |
|-------------|-------------|-------------------------|
| DATE | MAY 2, 2011 | OUTLINE DIMENSIONS |
| CATALOG NO. | XP1256 | 3-PHASE INDUCTION MOTOR |



DWG. NO. 3A040T3290
REV: 00