
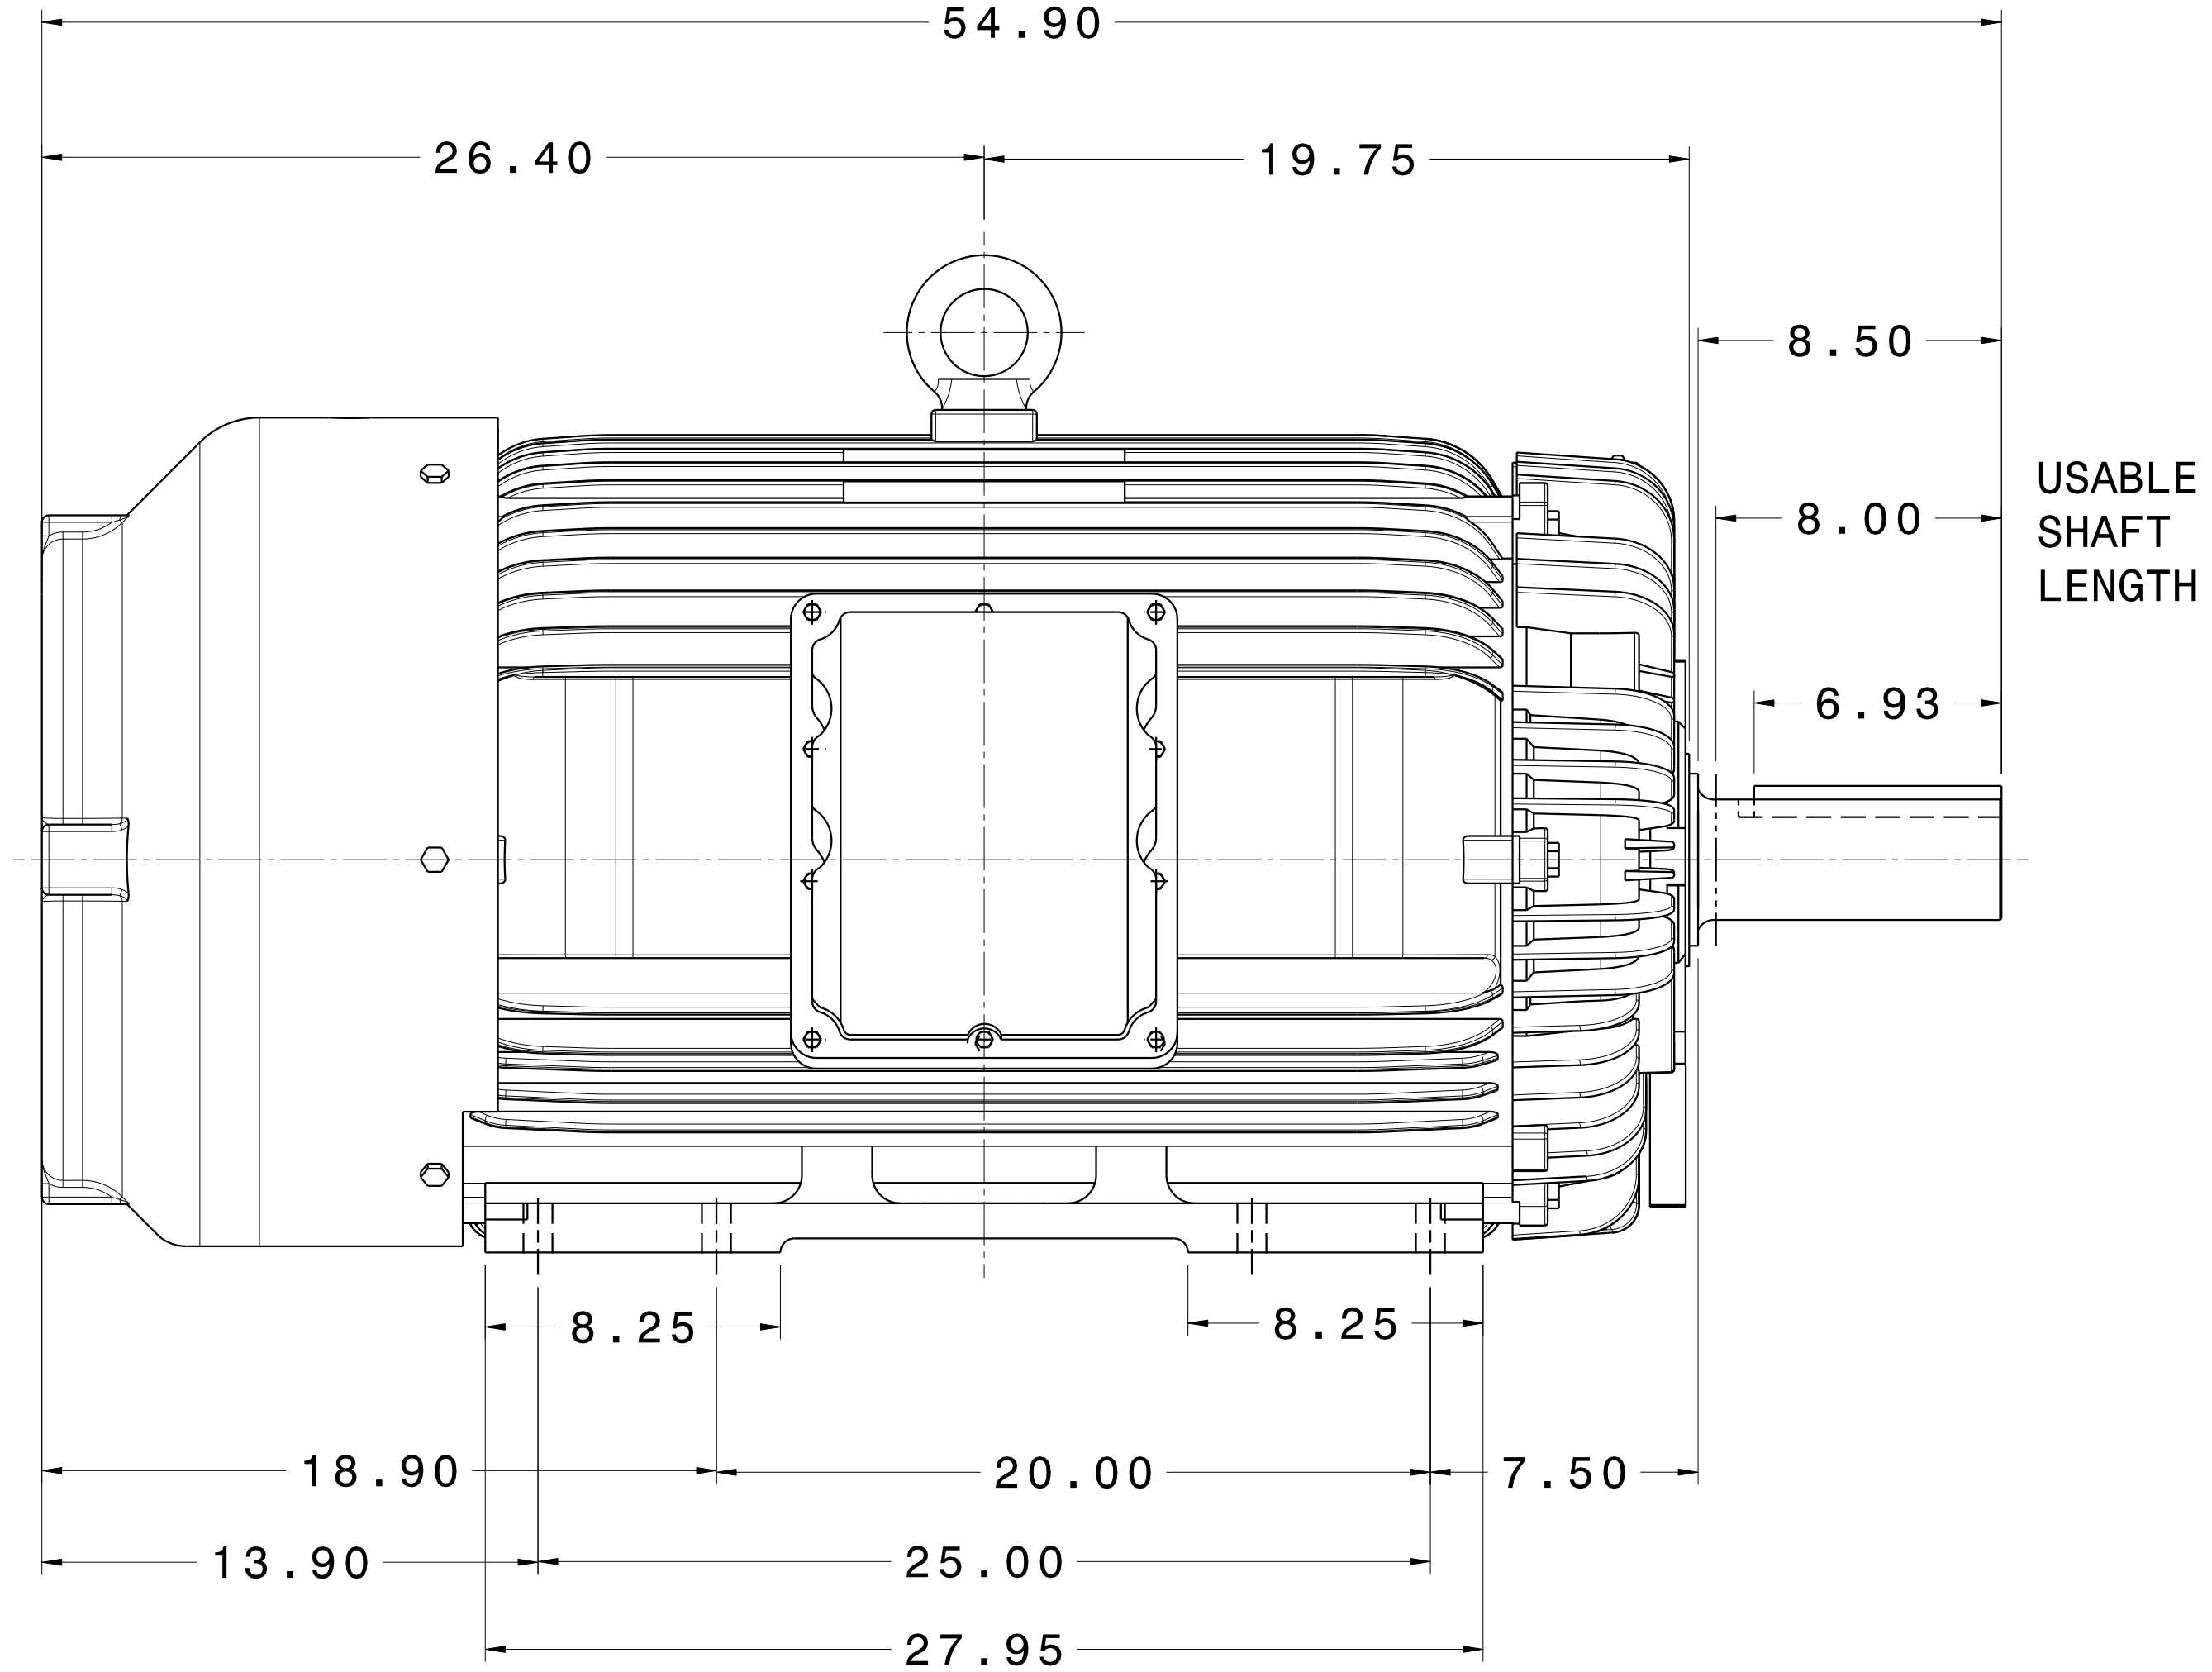


CATALOG #	TYPE	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
XP2006R	AEHHXU	447T	200	186.5	6	1200	460	60	CONT.	F	1.15	NU320C3	6316C3	3000


TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL CAGE MOTOR

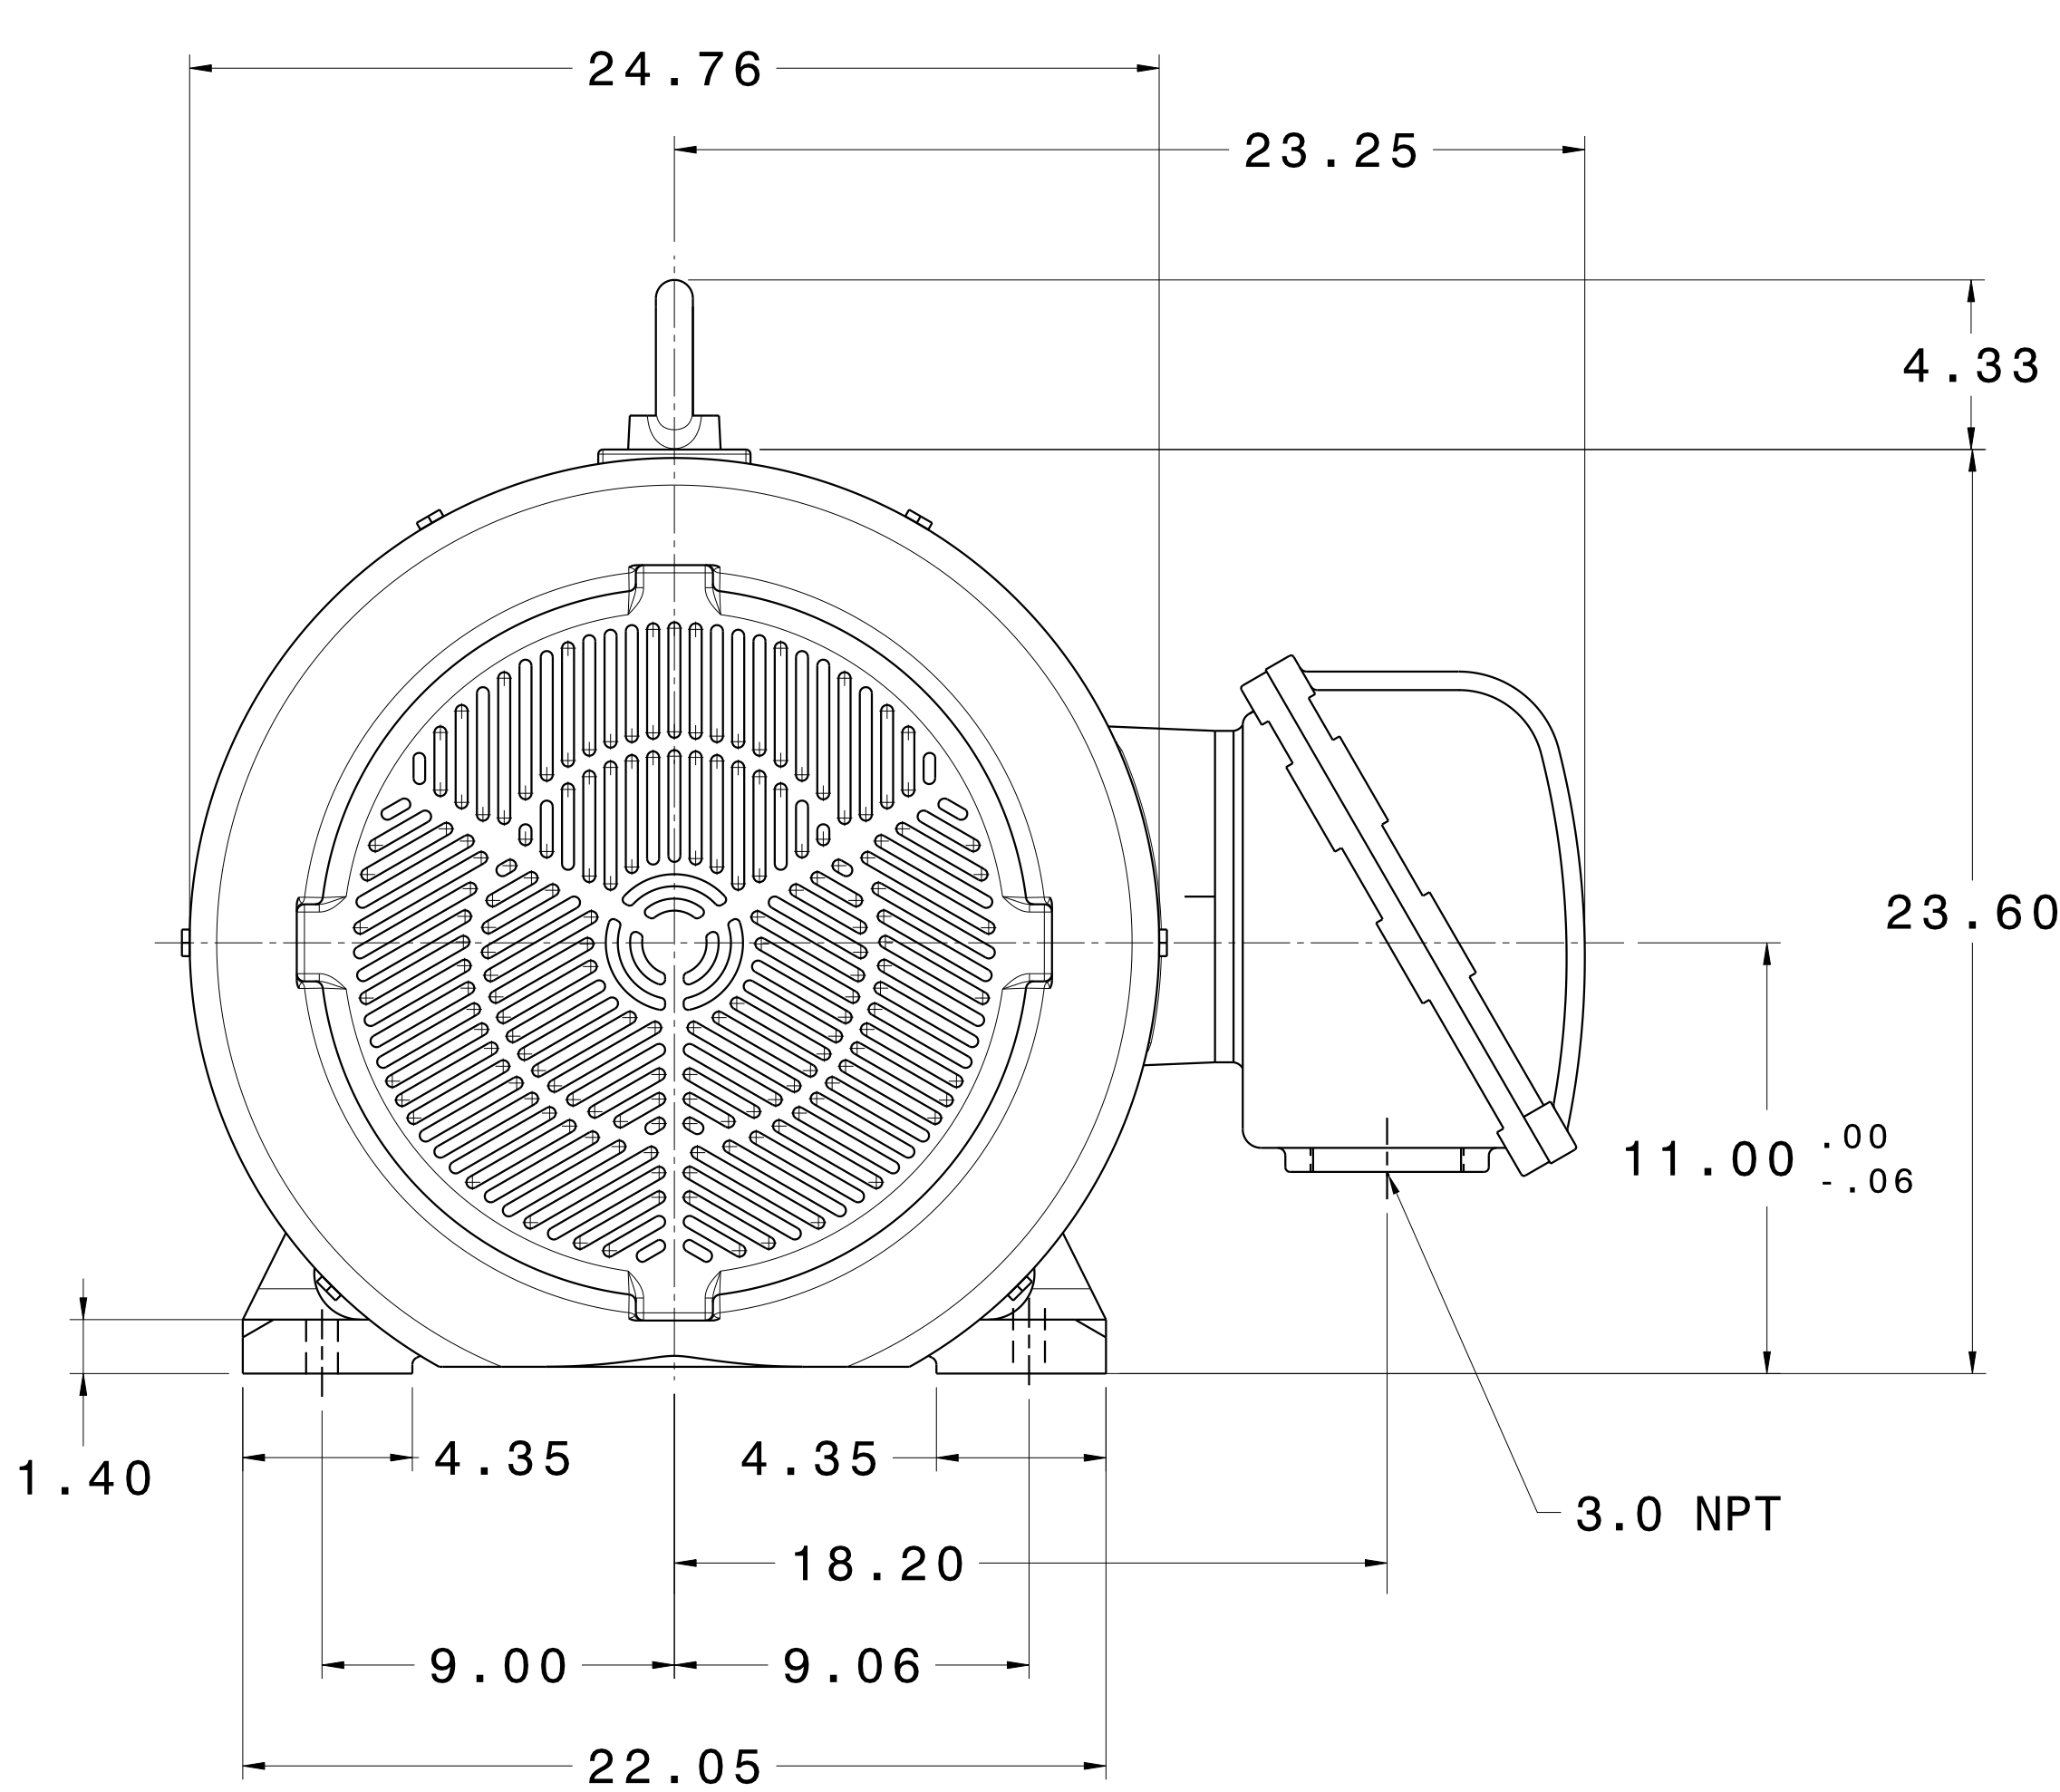

USABLE
SHAFT
LENGTH

NOTES:

1. DIMENSIONS IN INCH.
2. ENCLOSURE: IP55.
3. FOR DIRECT FLEXIBLE COUPLING.
4. SUITABLE FOR DIVISION I, CLASS I, GROUP D AND CLASS II, GROUPS E,F,G.

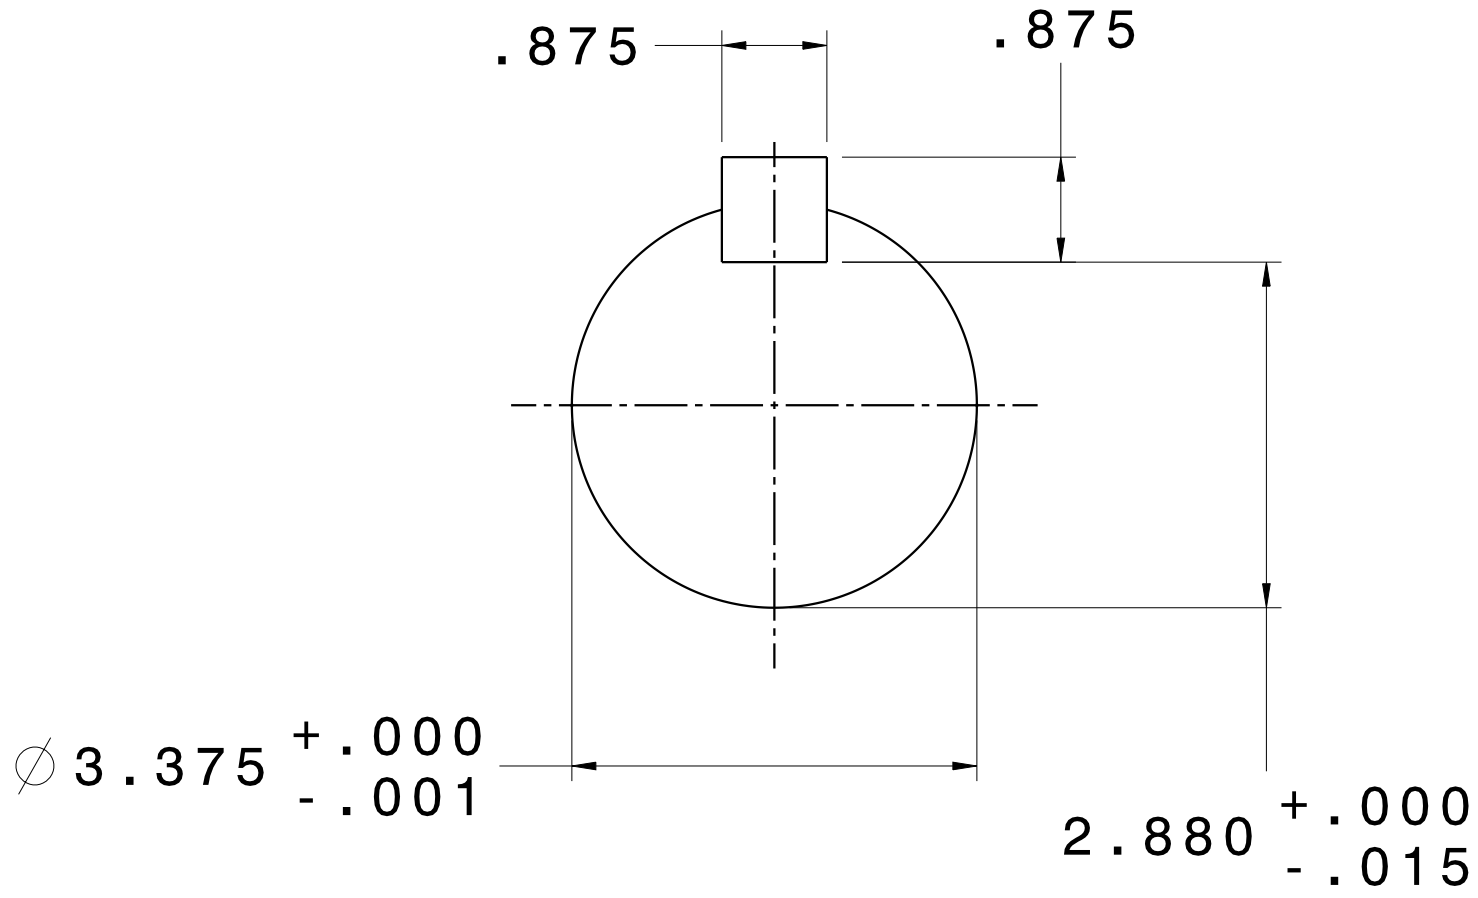

REV. DATA					REV NO 01
	TEC Westinghouse				
REF:	3-PHASE INDUCTION MOTOR OUTLINE DIMENSIONS				DWG NO. XP2006R
	DWN T. FELPS	082624	APPD S. GROHOSKY	042616	
	TECO-WESTINGHOUSE MOTOR COMPANY				ROUND ROCK, TEXAS USA