

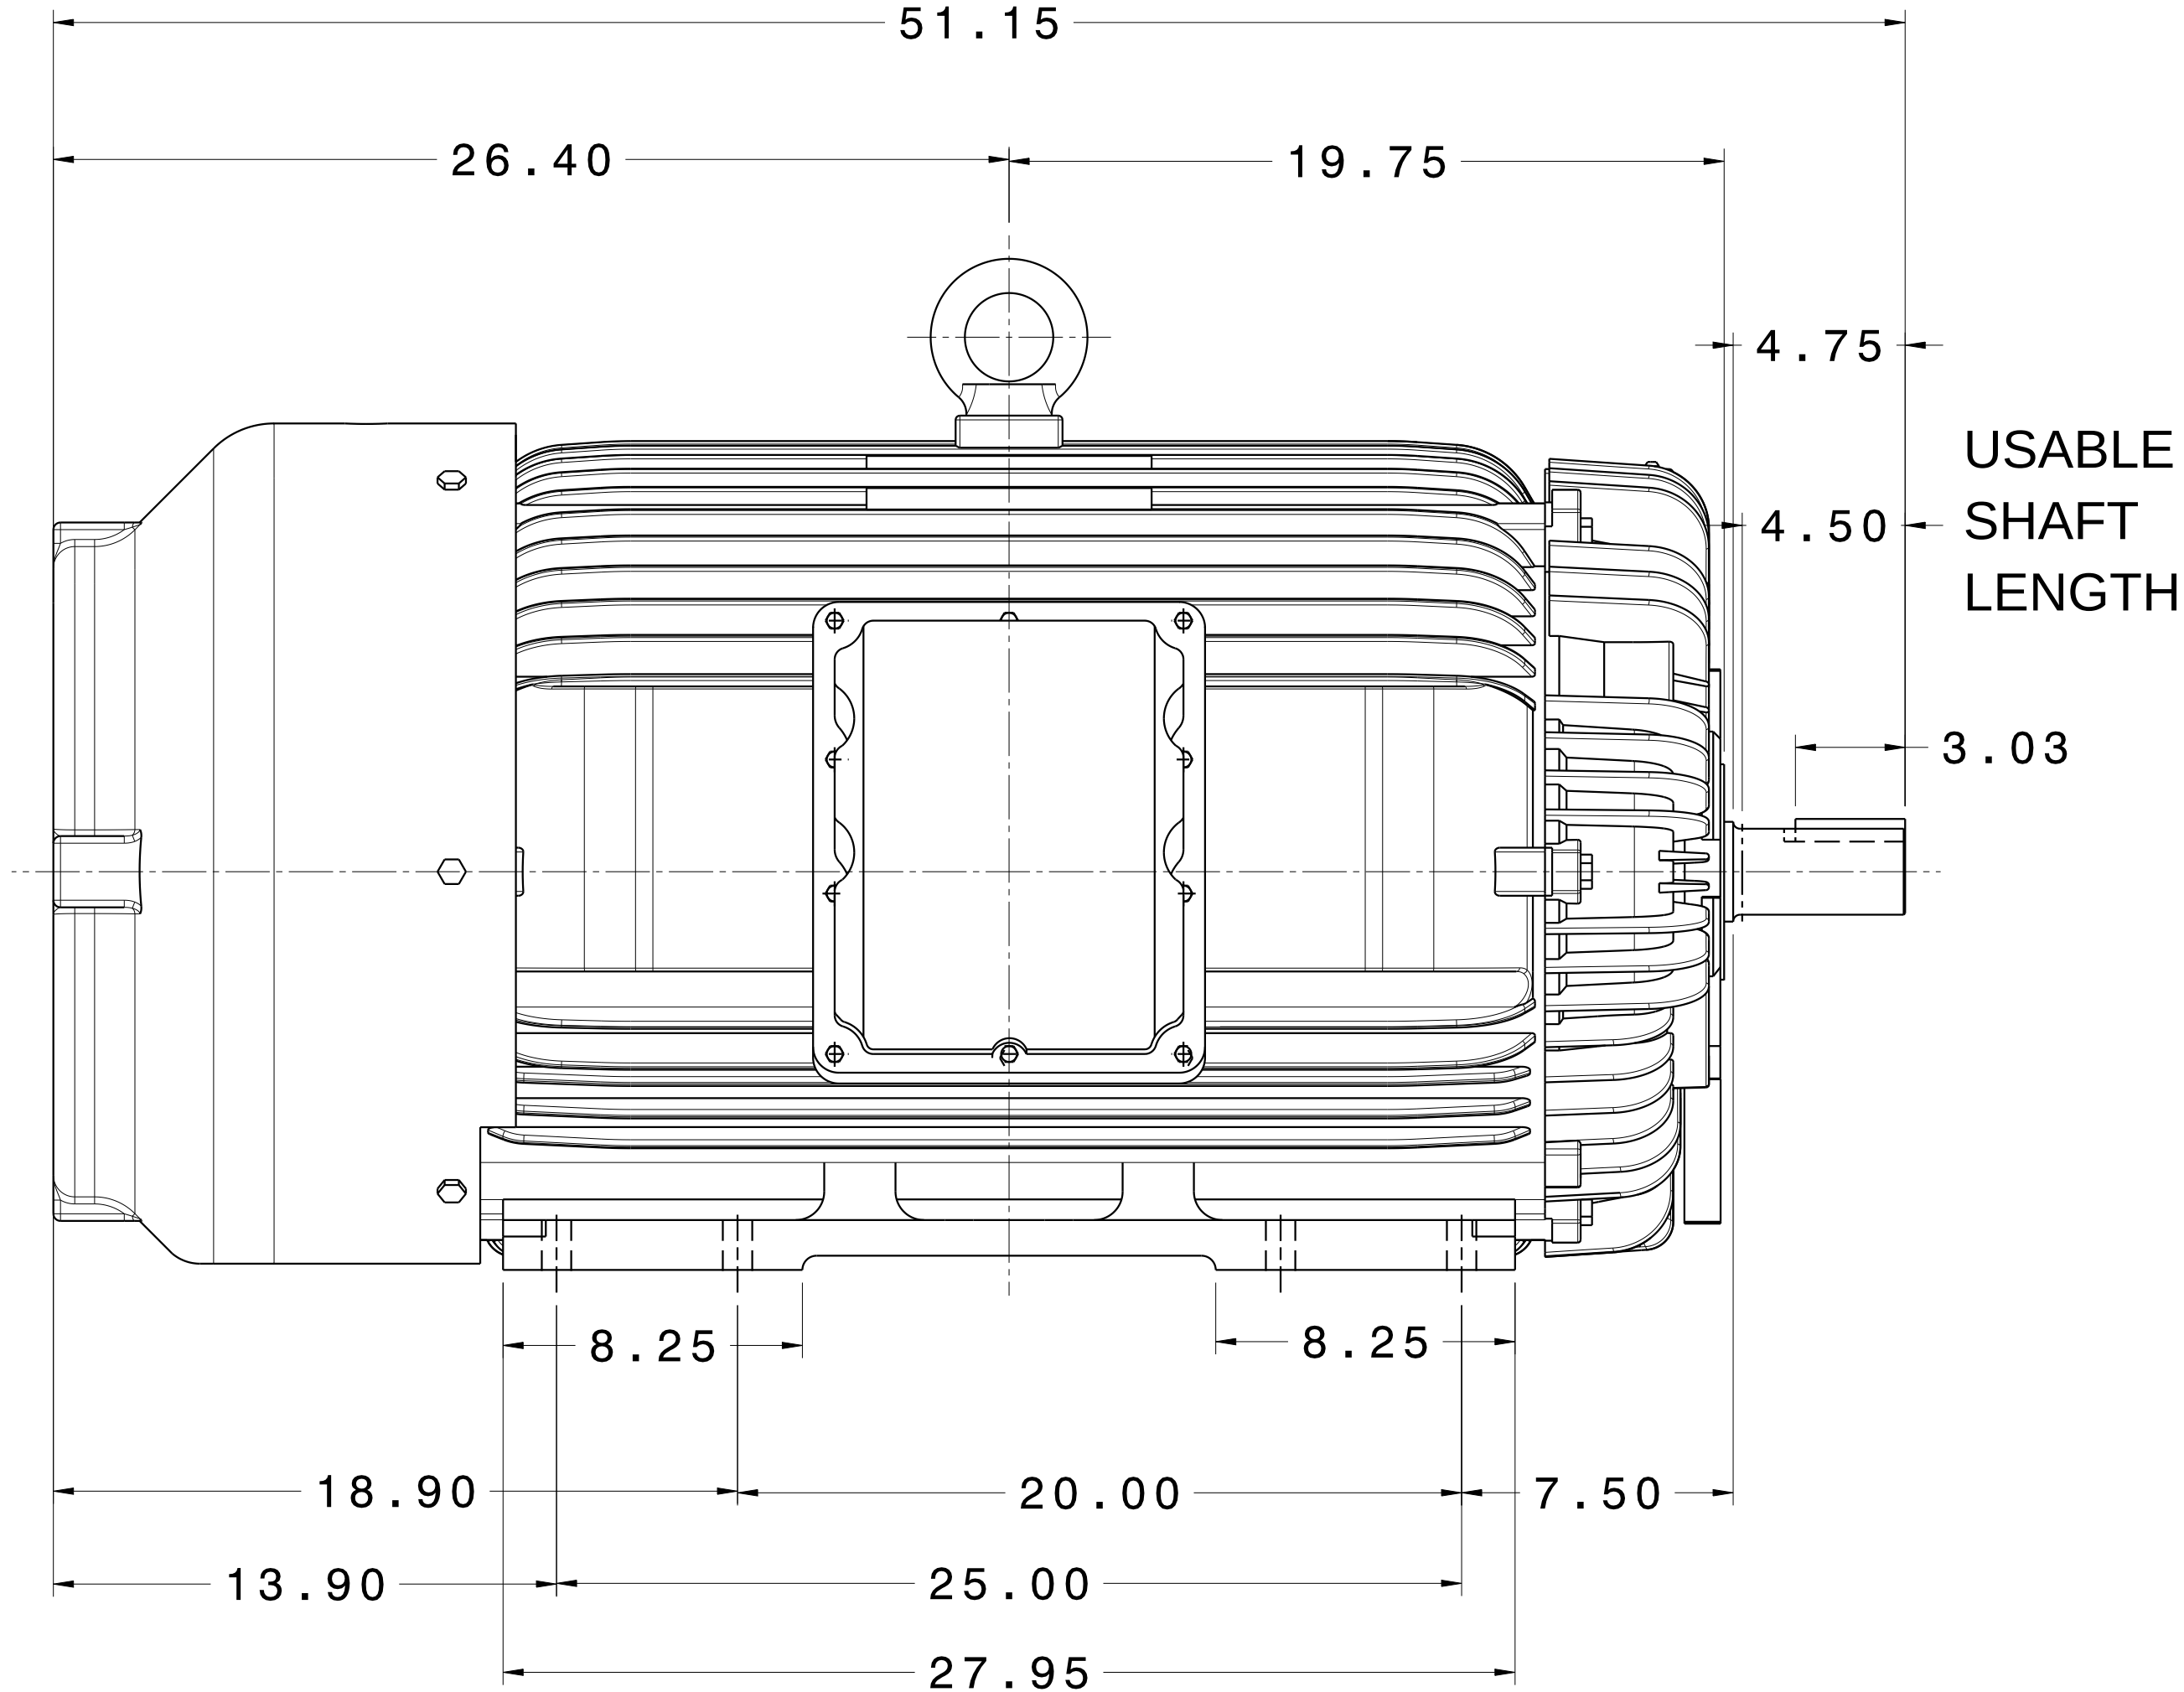


CATALOG #	TYPE	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
XP2502	AEHHXU	449TS	250	186.5	2	3600	460	60	CONT.	F	1.15	6316C3	6316C3	3200

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL CAGE MOTOR

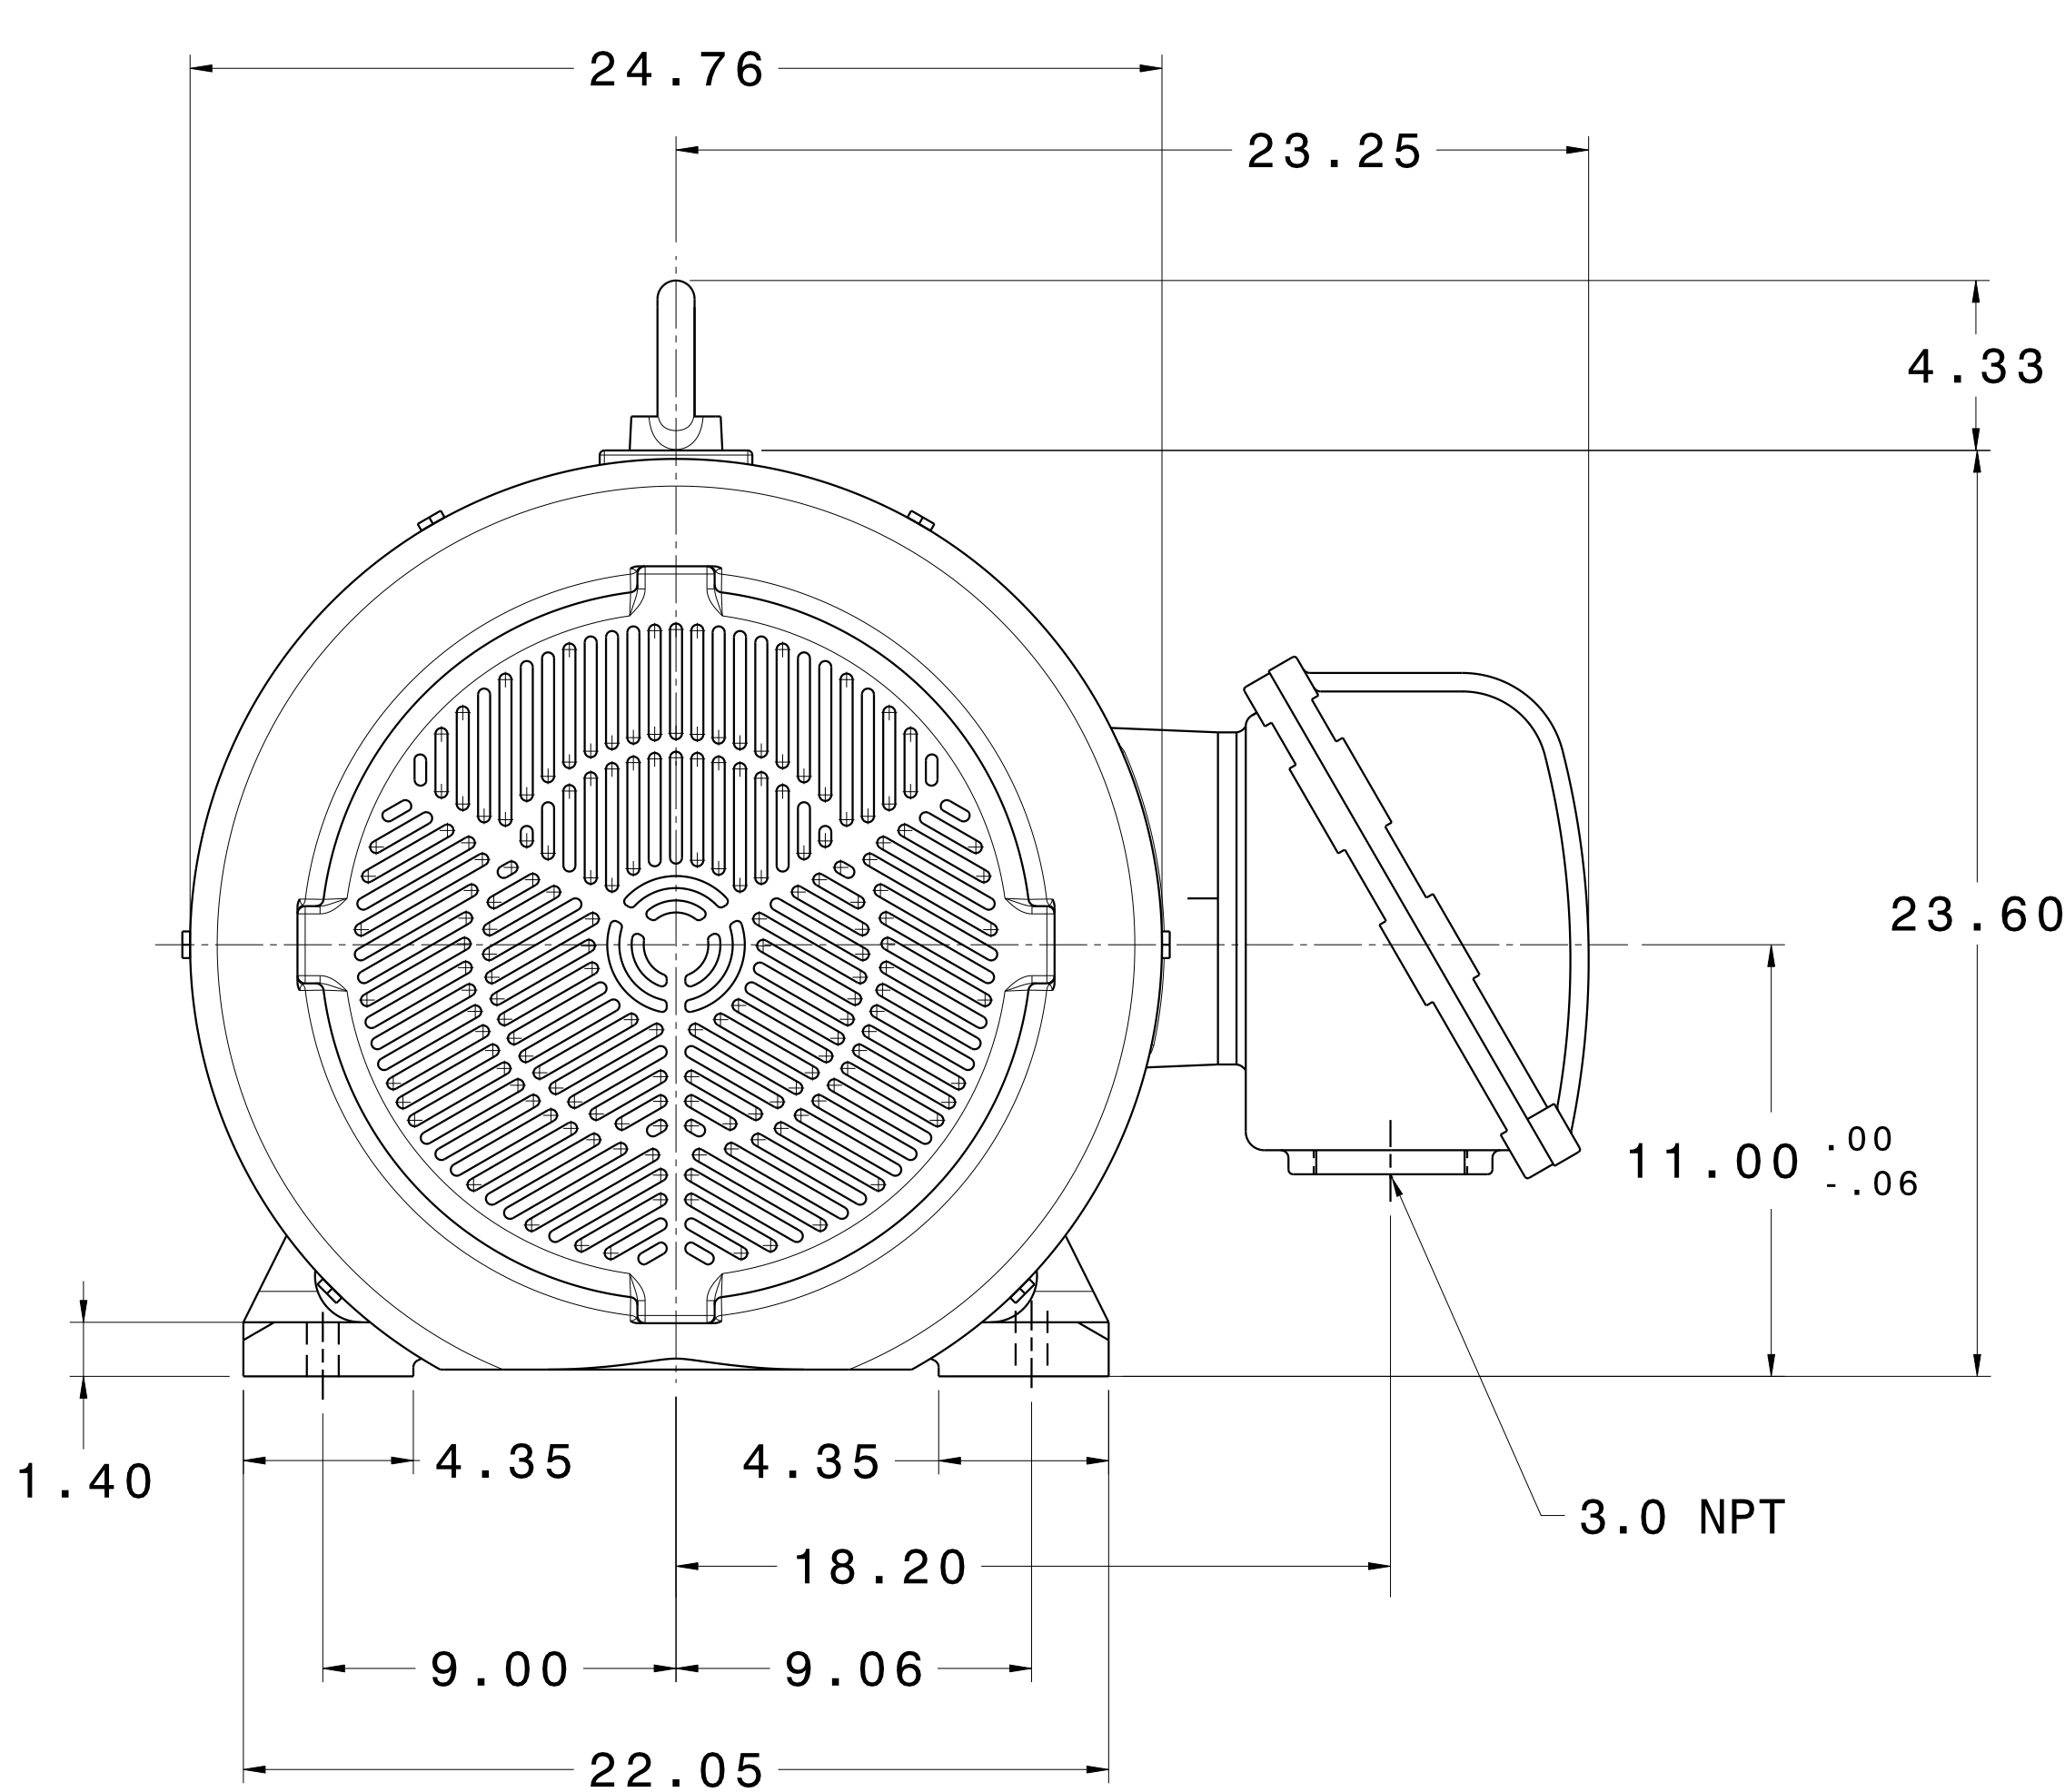

USABLE
SHAFT
LENGTH

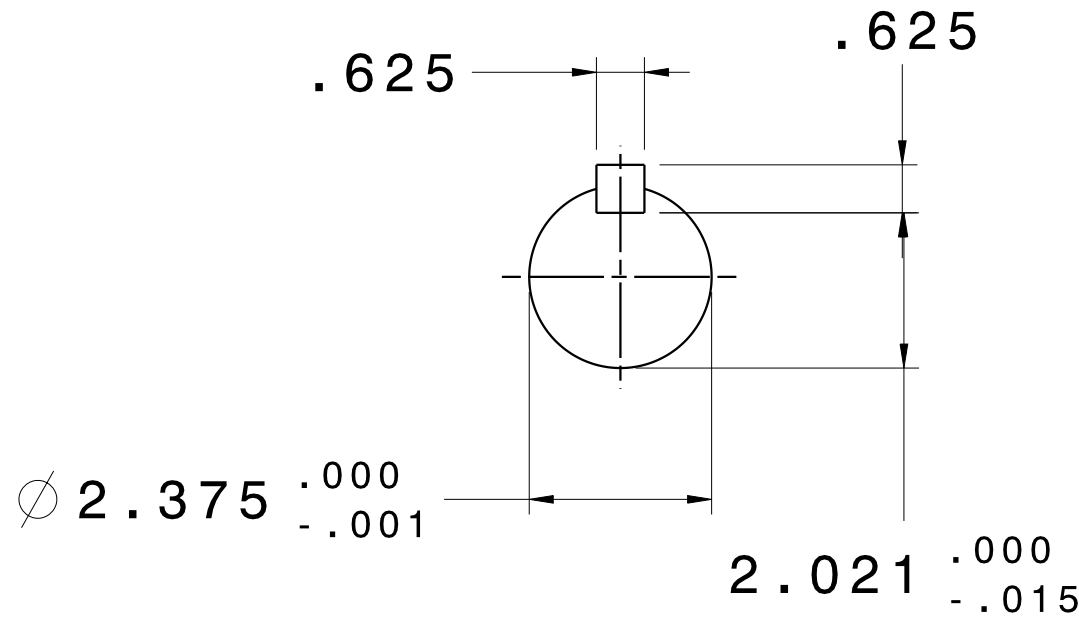

- NOTES:
1. DIMENSIONS IN INCH.
 2. ENCLOSURE: IP54.
 3. FOR DIRECT FLEXIBLE COUPLING.
 4. SUITABLE FOR DIVISION I, CLASS I, GROUP D AND CLASS II, GROUPS E,F,G.

REV. DATA					REV NO
	TEC Westinghouse				01
REF:	3-PHASE INDUCTION MOTOR OUTLINE DIMENSIONS				DWG NO. XP2502
	DWN T. FELPS	071714	APPD S. GROHOSKY	071714	
	TECO-WESTINGHOUSE MOTOR COMPANY				ROUND ROCK, TEXAS USA