
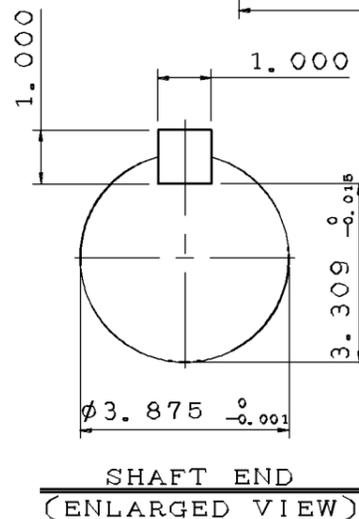
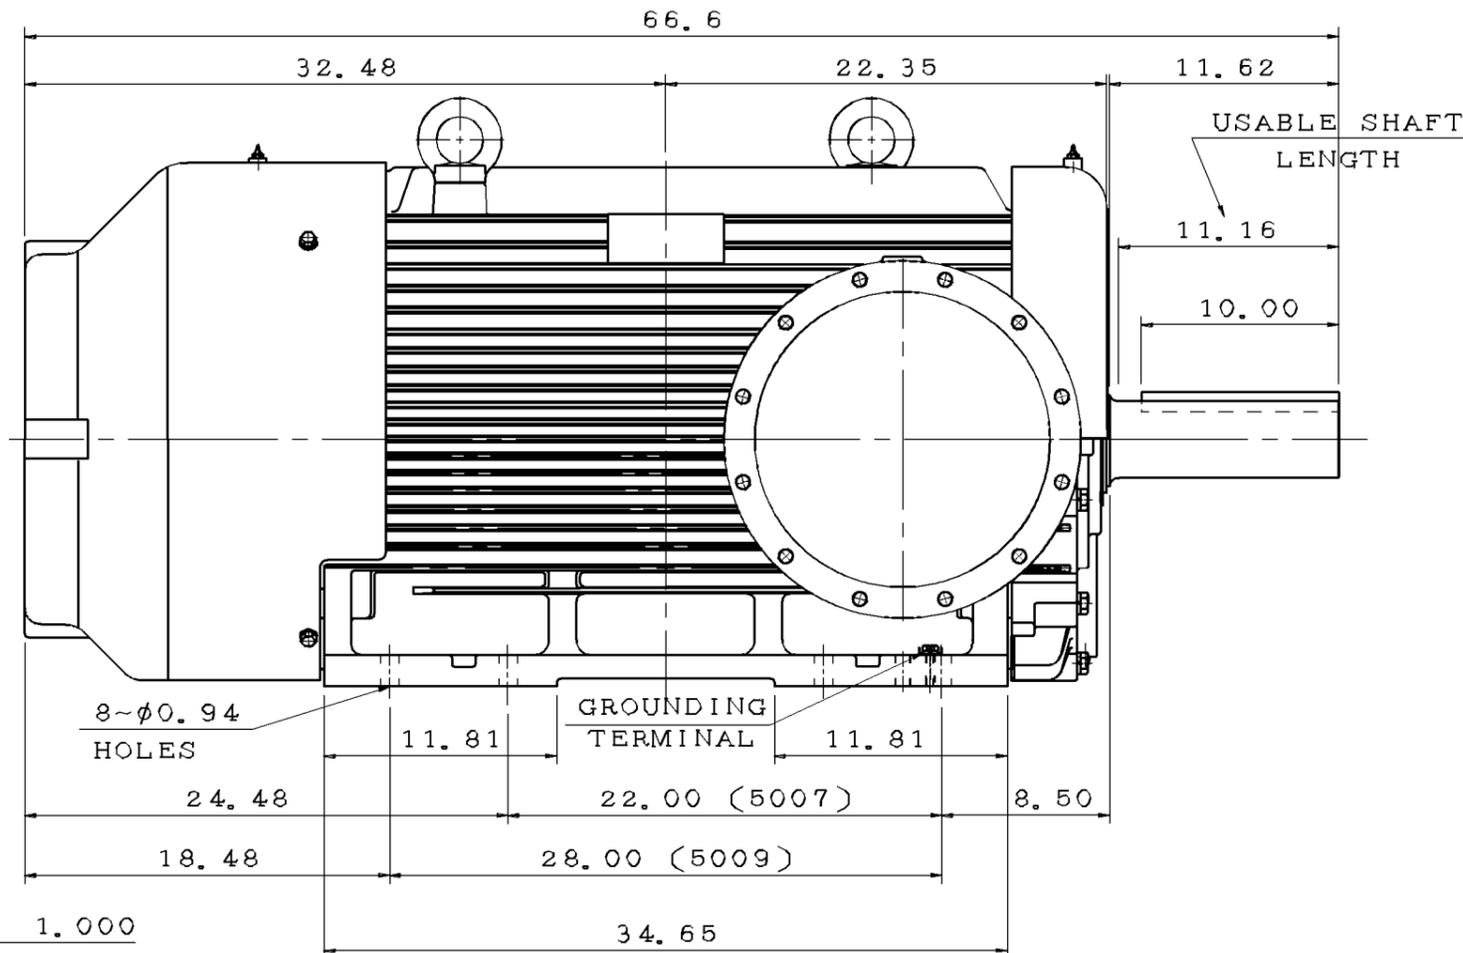


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R. P. M
	HP.	kW.					
AEHH-XU	400	299	4	CONT.	460	60	1800

TOTALLY ENCLOSED FAN-COOLED TYPE. SUIRREL-CAGE ROTOR.

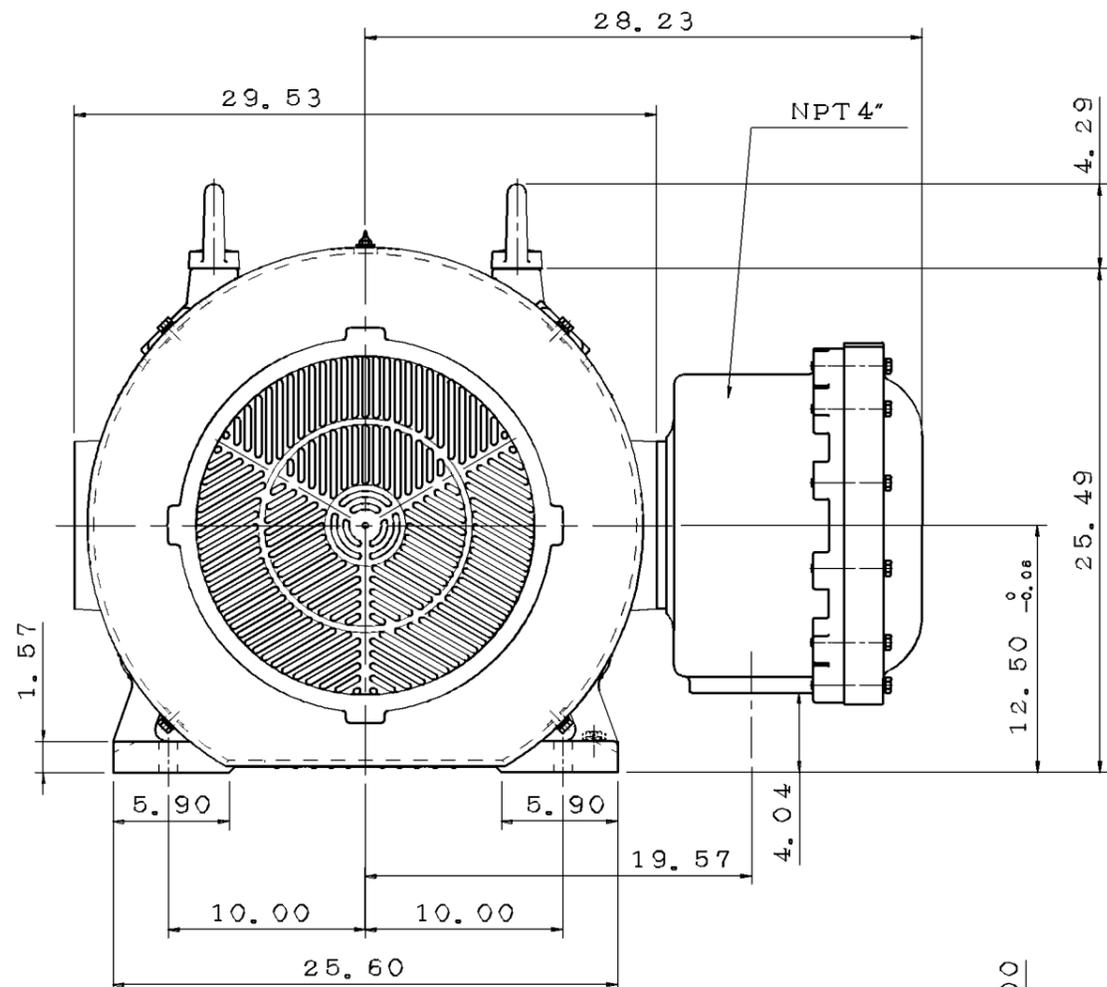

NOTE:

1. DIMENSIONS IN inch
2. FRAME NO. 5007B
3. F CLASS INSULATION, S. F. 1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP44
6. BEARING SIZE: DRIVE-END 6324
OPP. DRIVE-END 6320
7. UL EXPLOSION PROOF
8. WITH THERMOSTAT: N. C. 145°C 3PCS
9. NON-SPARKING FAN
10. MOTOR APPROX. WEIGHT: 48051b

DATE	June 21, 2016	OUTLINE DIMENSIONS
Catalog #	XP4004	3-PHASE INDUCTION MOTOR

DWN.	R. SHEN	MAR. 21. 2016
CHKD.	Y. LEE	MAR. 29. 2016
APPD.	C. LIU	MAR. 29. 2016

TECO Westinghouse

DWG NO. REV:00
4B040Q710