

Technical Documentation

HB1/525C

Advantage Plus IEEE Ready | AEHH8R

Date: January 21, 2022

	
	Date: January 21, 2022

Technical Data Sheet

Motor Type: AEHH8R	Catalogue No: HB1/525C
--------------------	------------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
1.5	2	3465	143TC	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
84.00	81.50	84.00	81.50	83.50	77.00	65.00
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
2.27	340	280	350	0.7	1.6	16.00
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
M	0.052	1.80	6.70	17	12	60.0

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
6-60Hz	3-60Hz	60-120Hz	≤ 5 kHz	VPWM or CPWM	1.0 Only

Hazardous Locations Information

CSA Certified	Other Certification
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA	Class II, Div 2, Groups F & G
Temp Code (Sinewave / VFD)	T3C / T3C

Additional Certifications

Additional Information


Bearings		Approx. Weight
DE	NDE	lbs
6205ZC3	6205ZC3	46

Nameplate Drawing

Advantage Plus IEEE Ready

TYPE	AEHH8R	CAT. NO.	HB1/525C		
OUTPUT	1.5 HP 1.12 kW	FRAME	143TC	TEFC	
R.P.M.	3465	POLE	2	INS.	F
VOLTS	575	PHASE	3	Hz	60
AMPS	1.6	CODE	M	S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 84.00		MIN. EFF. 81.50	
BEARINGS	6205ZC3 / 6205ZC3			RATING Cont.	
SER. NO.	TBD		DESIGN	B	WT. 46 LBS
PWM VFD DUTY	VT	CT	CP	S.F.	
	3-60Hz	6-60Hz	60-120Hz	1.0 Only	

Connection Diagram

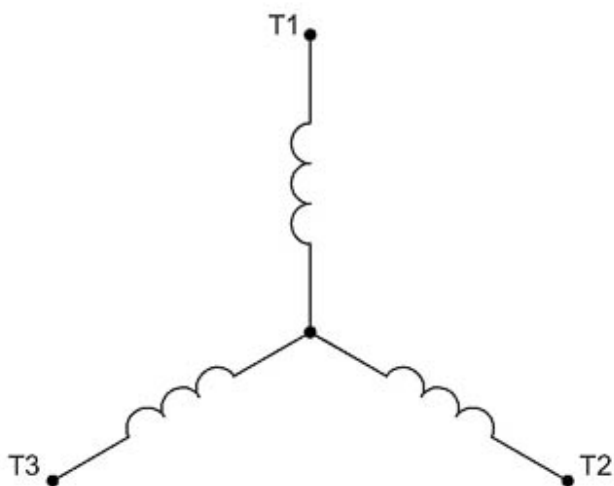


3 LEAD		SINGLE VOLTAGE			WYE
VOLTAGE	CONN.	L1	L2	L3	
-	WYE	1	2	3	

WD_3Y

Thermal Limit Curves

Motor Type: AEHH8R		Catalogue No: HB1/525C		Family: Advantage Plus IEEE Ready	
HP	1.5	Safe Stall Time		Full Load A	1.6 A
Voltage	575V 60Hz	Hot	12 s	% Inrush	1,000 %
RPM	3600	Cold	17 s	Locked Rotor A	16.00 A

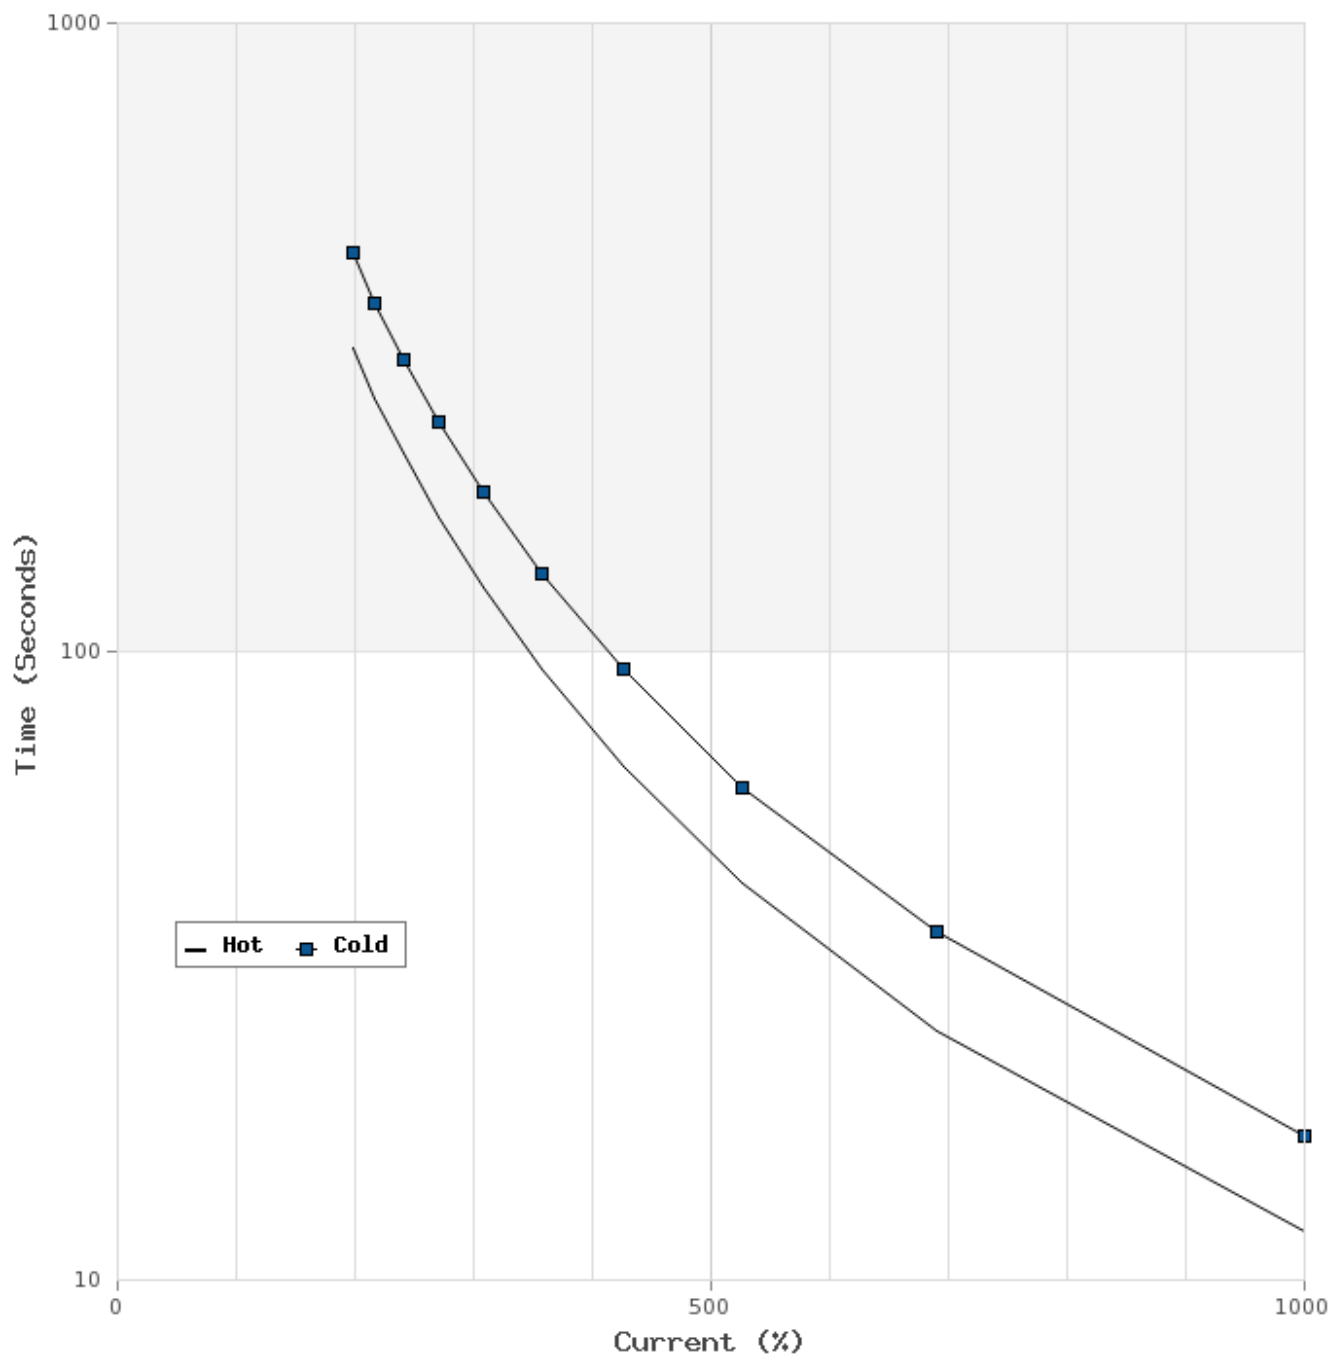

T-N and I-N Curves

Motor Type: AEHH8R		Catalogue No: HB1/525C		Family: Advantage Plus IEEE Ready	
HP	1.5	Full Load T	2.27 lb-ft	Full Load A	1.6 A
Voltage	575V 60Hz	Locked Rotor T	340 %	Locked Rotor A	16.0 A
RPM	3600	Pull Up T	280 %	Break Down T	350 %

